

# HONDA



Honda Power Equipment

Snowblowers • Generators

# The Legacy of Honda

Our storied history began with a goal: push technological boundaries and ensure the best customer experience possible. Honda Power Equipment recently celebrated the production of 100 million power products worldwide—a testament to our legendary reliability.

## Durability

Engineered with the ability to withstand the elements, the demands of your job and continuous use from one season to the next, Honda products are made to last.

## Quality

Honda has built a strong reputation on quality, so you can rest assured that your Honda product is made of quality materials, as well as quality in the functionality and practicality of the design.

## Reliability

At Honda, we put our decades of experience towards ensuring that your Honda product is engineered to provide results that you can count on, year after year.



Celebrating Over 50 Years  
Honda Generators



## The Legendary Honda Engine

Honda has more than six decades of experience in designing innovative engines. Today, we are the largest engine manufacturer on the planet, and only Honda offers a powerful 4-stroke engine designed perfectly for your Honda Power Equipment product.

## Over 50 Years of Trusted Honda Generators

Honda produced its first generator in 1965. More than fifty years later, our lifestyle-focused generators continue to be the top choice for Canadians who rely on innovative technology.

## Bringing Technology to Life

Meet ASIMO, the result of more than two decades of development between Honda engineers and scientists. An advanced humanoid robot, ASIMO (or Advanced Step in Innovative Mobility) can run, climb stairs, and carry objects.

## Taking Technology to New Heights

The HondaJet is the culmination of the Honda vision to bring personal mobility to the skies. In 2014, the first HondaJet took flight. Today, HondaJets represent the fastest, quietest and most fuel-efficient jets in their class.



Since 1980, Honda has offered a continuously-evolving lineup of snowblowers designed to meet the changing needs of our customers. When you buy a Honda Snowblower, you're buying reliability, ease of use, proven power that clears heavy snow, and Honda innovation you can trust. No Canadian garage or home is complete without one.

## The Honda Retail Experience

Honda Power Equipment retailers are expertly trained to provide the highest level of knowledge, service and support—with more than 300 Honda Power Equipment retailers conveniently located across Canada.

Our Honda experts will help you find the right snowblower or generator to get the job done.

Plus, each specialized Honda retail store professionally assembles your product and offers a detailed working demonstration. They are available to service and repair products according to stringent factory standards. Canadians can rely on knowing that Honda Power Equipment has retail support that lasts the lifetime of their Honda product.

## Honda Plus Extended Warranty

All Honda Power Equipment products come with a standard distributor's warranty. With Honda Plus Extended Warranty, repairs are covered with zero deductible. Honda Plus is also fully transferable under most conditions, and ensures your product is repaired by qualified Honda technicians using high-quality Honda Genuine parts. Some restrictions or exclusions apply. For more information on warranty, please visit your local retailer or [honda.ca](http://honda.ca).

## Why Honda?

Honda Power Equipment products are easy to start. They don't mix oil and gasoline, which offers many advantages including clean and quiet operation, few fill-ups, low maintenance costs, and low emissions. Additionally, Honda products are dependable—you can count on them for years to come.



# Snowblowers

Thanks to the presence of a Honda engine in every Honda Snowblower, you can trust in its reliability, ease of use, proven power for heavy snow clearing and the customer support that comes with every Honda product. Put the Honda Snowblowers to the test this winter and see what over 35 years of Honda innovation can do for your winter.

Single-Stage/Dual-Stage



## Single-Stage vs. Dual-Stage Snowblowers

Honda makes both single-stage and dual-stage snowblowers to suit different snow removal needs



**Single-stage** are lightweight, compact and ideal for light to moderate snow conditions (less than 20 cm [8 in.]). They can handle small jobs like sidewalks, walkways and short driveways. Single-stage snowblowers rapidly take in snow and direct it through a discharge chute in a single motion, hence the name, single-stage. The auger (the blade you see in front of the blower) makes contact with the surface you are clearing and therefore should only be used on paved surfaces.



**Dual-stage** are ideal for handling large amounts of snow on any surface. Dual-stage snowblowers have two stages of snow removal—the auger collects the snow, and an impeller then discharges the snow through a chute, throwing it faster and farther away. The two stages of snow removal, combined with the fact that the auger doesn't touch the ground, makes them perfect for clearing any surface (including gravel or dirt). The variable speed hydrostatic transmission that comes standard with each dual-stage Honda snowblower makes it easy to clear large volumes of snow, even on sloped surfaces, quickly and easily.



### Hydrostatic Transmission<sup>†</sup>

The intuitive hydrostatic transmission easily sets a more comfortable pace and can change speeds without disengaging tracks/wheels. The single centralized control allows for quick, smooth transitions between forward and reverse with precise speed adjustment—without affecting the auger rotation speed.

<sup>†</sup>Available on HSS724ACT/ACTD, HSS928ACW/CT/CTD, HSS1332ACT/CTD models.



### 4-Stroke Honda Engine

An efficient, easy-start 4-stroke Honda engine (including single-stage models) powers every snowblower. All dual-stage snowblowers feature commercial-grade Honda GX series engines built for easy, reliable, cold weather starts.



### Track Drive

The excellent track drive snowblowers from Honda feature pliable, low-temperature tracks with sure-gripping cleats for greater control, helping to ensure easy operation on steep inclines, declines and hard packed snow with excellent traction.




### On-Board Battery<sup>††</sup>

Eliminating the need for dependency on 120 VAC electric outlets for a plug-in start, the handy 12 VDC electric start with on-board battery is ready to go anywhere and anytime without a power source nearby. Also, all on-board battery models come standard with recoil pull start, for back-up purposes with the exception of the HSM1336iCTD.

<sup>††</sup>Available on HSS622CTD, HSS724ACTD, HSS928ACTD, HSS1332ACTD and HSM1336iCTD models.

# Choosing the Right Honda Snowblower for You

Choosing the right Snowblower is important to ensure the best experience and the most efficient results. Honda has simplified the decision process by asking questions designed to lead you directly to the best Honda Snowblower for your snow removal needs. It's easy; just follow the question path. Once you discover the Snowblower for you, learn more about your model on the following pages. Let's get started!

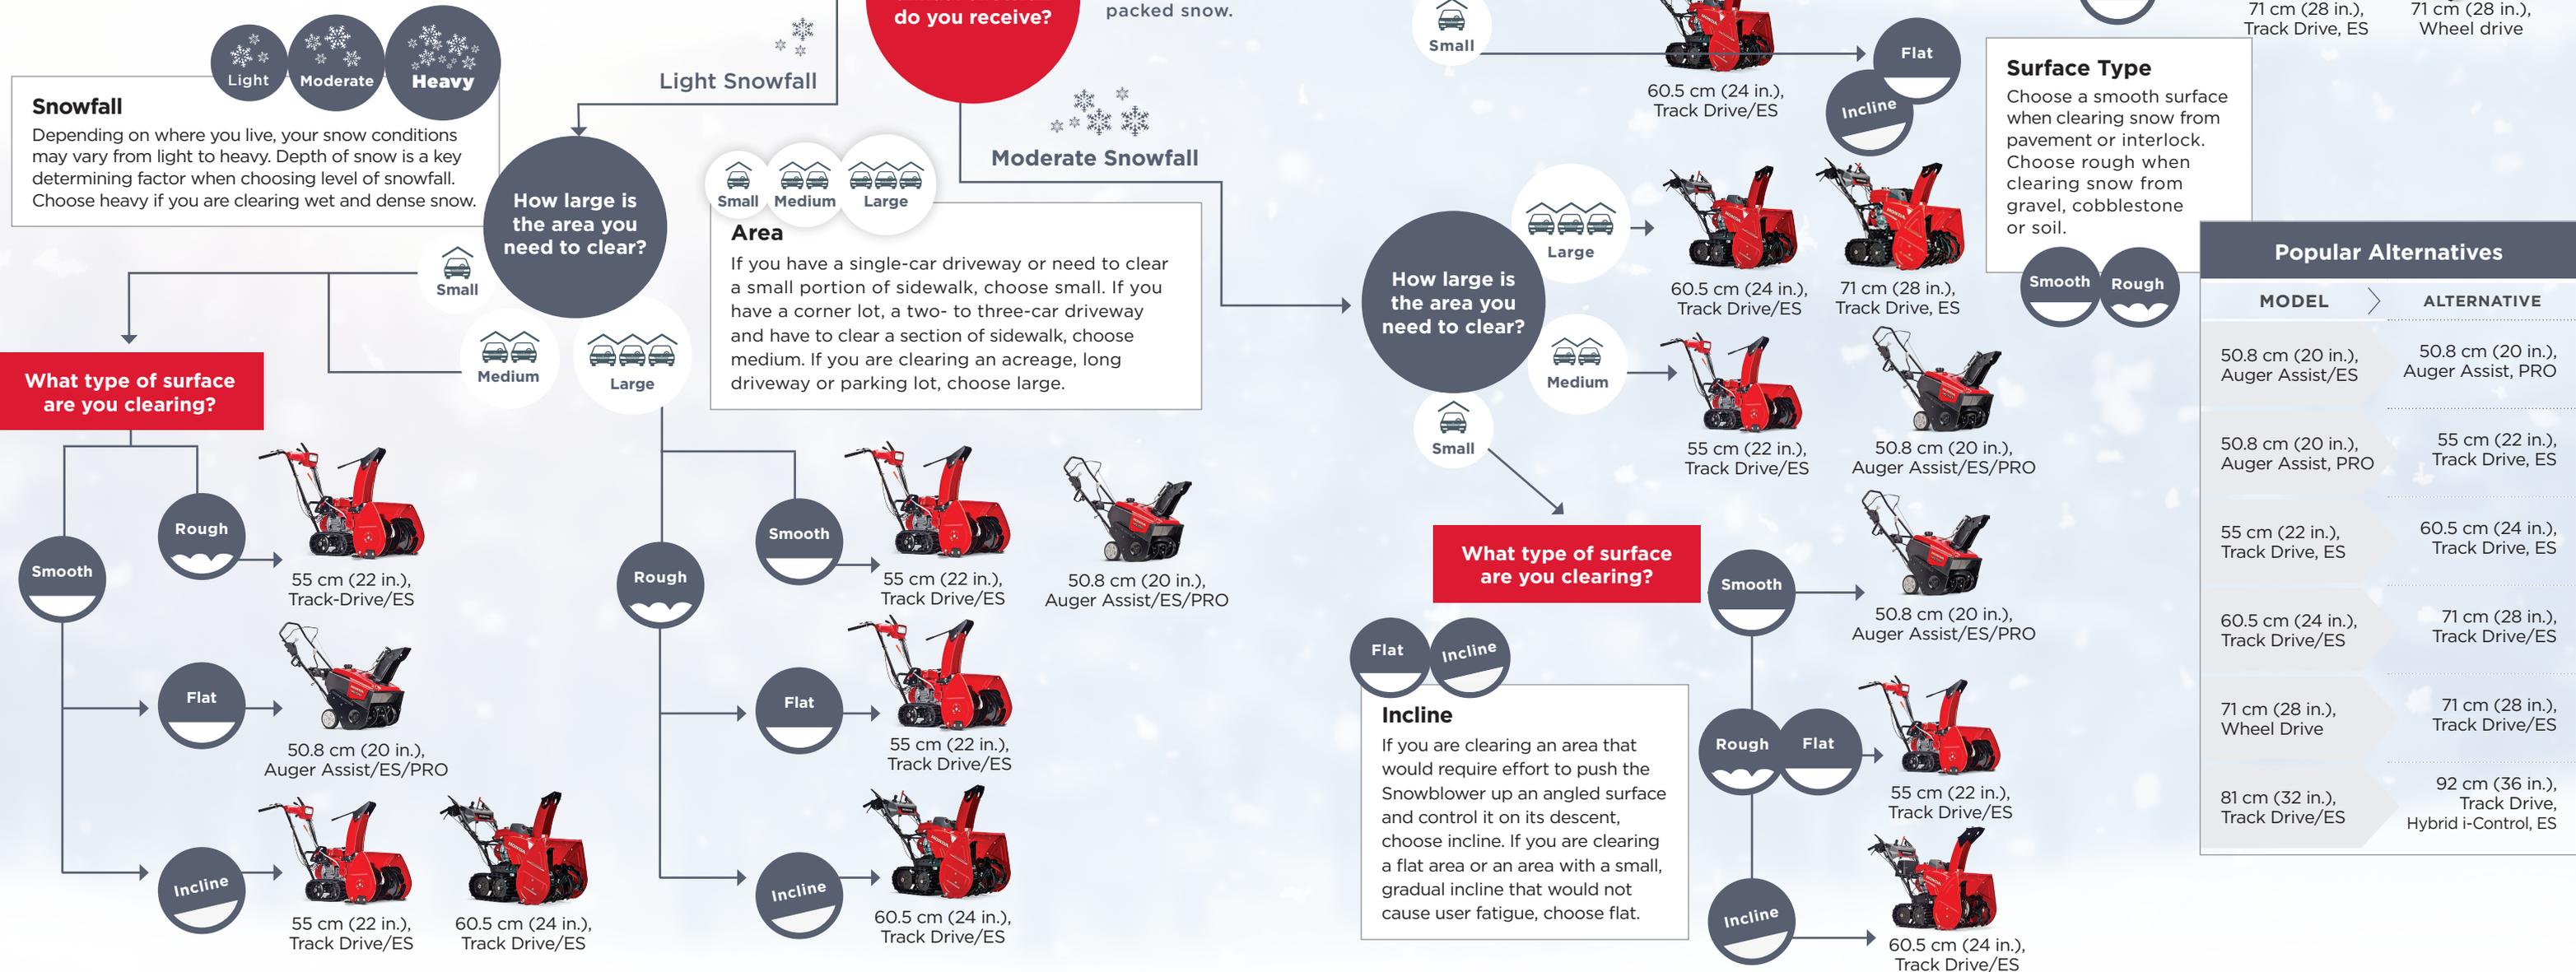

# Honda Snowblowers come with **great features** and **legendary Honda quality**

## Remote Electric Chute with Joystick Control

Versatile on-the-go joystick control governs height and direction of snow discharge, allowing adjustment to easily shoot snow up, down or side-to-side. Two-step chute on select models (CTD) gives even more precise control over snow discharge. Electric chute with exclusive joystick control is available on all dual-stage models with the exception of the HSS622 series.

## Ergonomic

Intuitive styling, layout and design helps to ensure easy-to-reach controls. The ergonomic controls provide quick and comfortable operation at your fingertips, including the hydrostatic transmission, auger height adjustment, remote electric chute and steering assist drive system for excellent maneuverability and optimal control.

## Steering Assist Drive System

Clever fingertip trigger steering controls offer improved maneuverability with or without engine running. With these levers, you can select which wheel/track should drive allowing precise turns for exceptional steering and effortless maneuverability on-the-fly.

## On-Board Battery

Eliminating the need for dependency on 120 VAC electric outlets for a plug-in start, the handy 12 VDC electric start with on-board battery is ready to go anywhere and anytime without a power source nearby. Also, all on-board battery models come standard with recoil pull start, for backup purposes.

## 4-Stroke Honda Engine (All Models)

An efficient, easy-start 4-stroke Honda engine (including single-stage models), powers every snowblower. All dual-stage snowblowers feature commercial-grade Honda GX series engines built for easy, reliable, cold weather starts.

## Track Drive


The excellent track drive snowblowers from Honda feature pliable, low-temperature tracks with sure-gripping cleats for greater control, helping to ensure easy operation on steep inclines, declines and hard packed snow with excellent traction.

## Automotive-Grade Steel Construction

Toughness and strength with all-steel, reinforced side auger housing and chute are combined with the heavy-duty auger to provide extra durability for long lasting performance.

## Skid Shoes

Skid shoes adjust the space between the auger housing and the ground to help protect ground/surfaces that are also reversible for extra-long service life. Wheel model (HSS928ACW) uses side-mount auger housing skid shoes, while other models employ rear-mounted auger housing skid shoes.

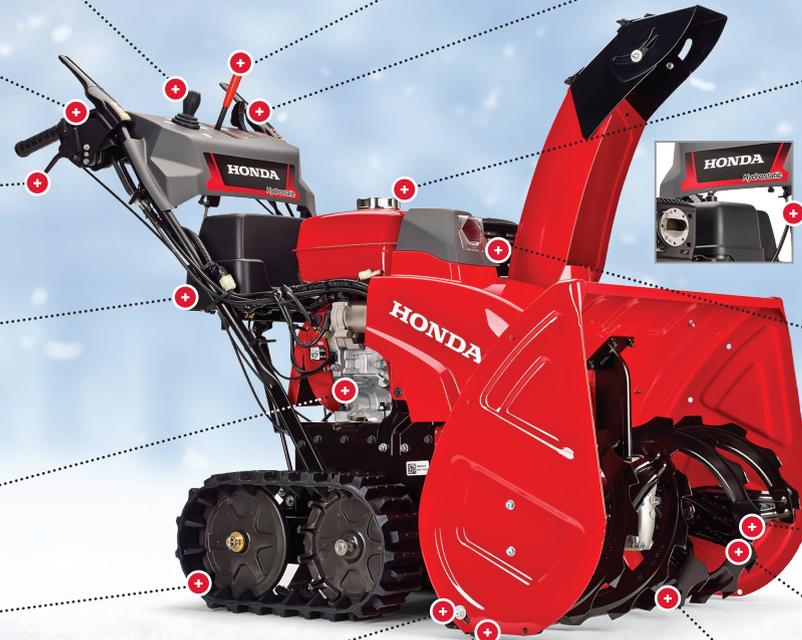

## Hydrostatic Transmission

The intuitive hydrostatic transmission easily sets a more comfortable pace and can change speeds without disengaging tracks/wheels. The single centralized control allows for quick, smooth transitions between forward and reverse with precise speed adjustment without affecting the auger rotation speed.

## Auger Height Adjustment Lever (Track Models Only)

Quickly go from one surface to another with the gas-assist auger height system. It adjusts the auger height to variable positions (left-hand thumb operation) according to changeable surface conditions (gravel, hard surface, interblock) or snow conditions. Move from your driveway to your sidewalk and back, on-the-fly.

## Operate with Ease

Featuring a conveniently large fuel tank with standard fuel gauge for extended run times between fill-ups, plus a winter glove-friendly tall fuel cap design with chain. A handy hour meter can also track usage and maintenance intervals (found on the 71 cm [28 in.] and 81 cm [32 in.] Track Drive ES models).

## Carburetor Icing Guard

Exclusive Honda carburetor icing guard (dual-stage models only, with the exception of the HSS622 series) is engineered to allow for reliable working without disruption, helping to prevent the carburetor from freezing or ice build-up due to extreme temperatures by warming cold air around the engine and directing heat to the carburetor.

## LED Work Headlight

Compact, crisp and clear LED technology provides more than exceptional lighting in all conditions, improving visibility for easy operation and adding safety for early morning or late night snow removal. The LED light offers performance and a lifespan that is not available with the incandescent bulbs offered by some other competitors" (on all dual-stage models with the exception of the 55 cm [22 in.], Track-Drive and the 92 cm [36 in.], Track Drive, Hybrid i-Control, ES).

## Dual-Stage Design

Advanced dual-stage auger and impeller design easily tackles some of the toughest winter conditions. The heavy-duty serrated auger is designed to break up icy, hard packed or extremely wet snow and the impeller sends it quickly up the chute.

## Shear Bolt Guard System

The exclusive Honda shear bolt guard system helps to protect your snowblower from mechanical damage and unnecessary downtime caused by unwanted debris. Should foreign material induce the auger to lock during operation, this clever feature is designed to automatically stop the engine, alert the operator and reduce the hassle of constantly replacing shear bolts.

## Heavy Duty Auger

The heavy-duty serrated auger breaks up icy, hard packed or extremely wet snow. Its design improves the centre of gravity and helps prevent the auger from riding up. Combined to the chamfered scraper bar and the oversized auger housing height, they optimize the throwing distance and volume for first-class snow clearing performance.

## Single-Stage

Lightweight and compact by design, single-stage snowblowers are easy to handle and take up similar storage space as a mower. Great primarily for flat, paved surfaces.

### 50.8 cm (20 in.), Auger Assist

HS720C



- Great for smaller paved driveways and sidewalks
- Single-stage, semi self-propelled, 50.8 cm (20 in.) clearing width
- Clears up to 45 metric tons (50 tons) of snow per hour<sup>†</sup>
- Lightweight and manoeuvrable, easy to transport and store
- Snow Director™ chute control

*20" Auger Assist ES includes all above features, plus 120 VAC electric start.*

### 50.8 cm (20 in.), Auger Assist, PRO

HS720CC



- Perfect for walkways, paved or interlocking stone driveways or commercial applications
- Single-stage, semi self-propelled, 50.8 cm (20 in.) clearing width
- Clears up to 45 metric tons (50 tons) of snow per hour<sup>†</sup>
- Higher durability, GS commercial light application engine

## Dual-Stage

If you need to quickly move heavy, deep snow from graveled, paved, hilly, or flat surfaces, then a dual-stage snowblower is your best option.

### 71 cm (28 in.), Track Drive

HSS928ACT



- Ideal for large driveways or other areas, heavy snow conditions or commercial applications
- Dual-stage, track drive, 71 cm (28 in.) clearing width
- Clears up to 52 metric tons (57 tons) of snow per hour<sup>†</sup> and throws it up to 16 metres (52.5 ft.)<sup>†</sup>
- Low noise muffler with protection guard

### 71 cm (28 in.), Track Drive, ES

HSS928ACTD



- Ideal for large driveways or other areas, heavy snow conditions or commercial applications
- 12 VDC electric start with manual recoil as backup
- Electric two-step chute with joystick control
- Shear bolt guard system and hour meter
- Dual-stage, track drive, 71 cm (28 in.) clearing width
- Clears up to 52 metric tons (57 tons) of snow per hour<sup>†</sup> and throws it up to 16 metres (52.5 ft.)<sup>†</sup>

## Dual-Stage

If you need to quickly move heavy, deep snow from graveled, paved, hilly, or flat surfaces, then a dual-stage snowblower is your best option.



### 55 cm (22 in.), Track-Drive

HSS622CT

- Perfect for steep city driveways, light to medium snow conditions
- Dual-stage, track drive, clears 55 cm (21.7 in.) width
- Clears up to 37 metric tons (41 tons) per hour<sup>†</sup>
- Remote throttle and choke controls (on the handlebar)

*Also available with 12 VDC electric start (battery)—22" Track Drive ES*



### 60.5 cm (24 in.), Track Drive

HSS724ACT

- Ideal for urban- or suburban-sized driveways, medium to heavy snow conditions or commercial applications
- Dual-stage, track drive, 60.5 cm (23.8 in.) clearing width
- Clears up to 42 metric tons (46 tons) of snow per hour<sup>†</sup> and throw it up to 15 m (49.2 ft.)<sup>†</sup>
- Exceptional traction with track drive

*Also available with 12 VDC electric start with manual recoil as backup, electric two-step chute with joystick control—HSS724ACTD.*



### 71 cm (28 in.), Wheel Drive

HSS928ACW

- Dual-stage, wheel drive, 71 cm (28 in.) clearing width
- Clears up to 52 metric tons (up to 57 tons) of snow per hour<sup>†</sup> and throws it up to 16 metres (52.5 ft.)<sup>†</sup>
- Infinitely variable hydrostatic transmission with steering assist drive system provides convenient and intuitive operation with optimum control.



### 81 cm (32 in.), Track Drive

HSS1332ACT

- Ideal for large or extra-large driveways or other areas, heavy snow conditions or commercial applications
- Dual-stage, track drive, 81 cm (31.9 in.) clearing width
- Clears up to 75 metric tons (83 tons) of snow per hour<sup>†</sup> and throws it up to 17 metres (55.8 ft.)<sup>†</sup>
- Low noise muffler with protection guard



### 81 cm (32 in.), Track Drive, ES

HSS1332ACTD

- Ideal for large or extra-large driveways or other areas, heavy snow conditions or commercial applications
- 12 VDC electric start with manual recoil as backup
- Electric two-step chute with joystick control
- Shear bolt guard system and hour meter
- Dual-stage, track drive, 81 cm (31.9 in.) clearing width
- Clears up to 75 metric tons (83 tons) of snow per hour<sup>†</sup> and throws it up to 17 metres (55.8 ft.)<sup>†</sup>



### 92 cm (36 in.), Track Drive, Hybrid i-Control, ES

HSM1336iCTD

- Ideal for any large property
- Computerized i-Control system automatically completes repetitive tasks and matches engine loads to snow conditions
- 24 VDC electric start, low noise and fuel efficient power, 92 cm (36 in.) clearing width
- Clears up to 83 metric tons (91 tons) of snow per hour<sup>†</sup> and throws it up to 19 metres (62.3 ft.)
- Move the snowblower without running the engine\*

<sup>†</sup>Varies with snow conditions. \*Maximum 3 minutes without the engine running. Note that images shown may vary from actual product.

# Snowblower Specifications

SPECIFICATIONS	SINGLE-STAGE			DUAL-STAGE			
	50.8 cm (20 in.), Auger Assist	50.8 cm (20 in.), Auger Assist, ES	50.8 cm (20 in.), Auger Assist, PRO	55 cm (22 in.), Track Drive	55 cm (22 in.), Track Drive, ES	60.5 cm (24 in.), Track Drive	60.5 cm (24 in.), Track Drive, ES
<b>Model Code</b>	HS720C	HS720CS	HS720CC	HSS622CT	HSS622CTD	HSS724ACT	HSS724ACTD
<b>Discharge Type</b>	Single-stage	Single-stage	Single-stage	Dual-stage	Dual-stage	Dual-stage	Dual-stage
<b>Axle Type</b>	Wheel	Wheel	Wheel	Track drive	Track drive	Track drive	Track drive
<b>Drive Type</b>	Auger assist	Auger assist	Auger assist	Gear mesh transmission	Gear mesh transmission	Hydrostatic transmission (HST) with Steering Assist Drive System 1.94 - 1.97 L	Hydrostatic transmission (HST) with Steering Assist Drive System 1.94 - 1.97 L
<b>Transmission Oil Capacity</b>	N/A	N/A	N/A	N/A	N/A	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later
<b>Recommended Oil</b>	N/A	N/A	N/A	N/A	N/A	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later
<b>Speeds</b>	N/A	N/A	N/A	2 forward / 1 reverse	2 forward / 1 reverse	Infinitely variable	Infinitely variable
<b>Maximum Ground Speed</b>	N/A	N/A	N/A	Forward (1): 22.2 m/min (72.8 ft./min) Forward (2): 52.8 m/min (173.2 ft./min) Reverse: 51 m/min (167.3 ft./min)	Forward (1): 22.2 m/min (72.8 ft./min) Forward (2): 52.8 m/min (173.2 ft./min) Reverse: 51 m/min (167.3 ft./min)	Forward: 60 m/min. (196.9 ft./min) Reverse: 48 m/min. (157.5 ft./min)	Forward: 60 m/min. (196.9 ft./min) Reverse: 48 m/min. (157.5 ft./min)
<b>Clearing Width</b>	50.8 cm (20 in.)	50.8 cm (20 in.)	50.8 cm (20 in.)	55 cm (21.7 in.)	55 cm (21.7 in.)	60.5 cm (23.8 in.)	60.5 cm (23.8 in.)
<b>Intake Housing Height</b>	30 cm (12 in.)	30 cm (12 in.)	30 cm (12 in.)	42 cm (16.5 in.)	42 cm (16.5 in.)	55 cm (21.7 in.)	55 cm (21.7 in.)
<b>Auger Diameter</b>	23 cm (9.1 in.)	23 cm (9.1 in.)	23 cm (9.1 in.)	30.5 cm (12 in.)	30.5 cm (12 in.)	35.5 cm (14 in.)	35.5 cm (14 in.)
<b>Auger Type</b>	Rubber edge	Rubber edge	Rubber edge	Steel	Steel	Steel serrated (Spiral)	Steel serrated (Spiral)
<b>Auger Drive</b>	Belt	Belt	Belt	Dry, multi-disc clutch	Dry, multi-disc clutch	Belt driven shaft	Belt driven shaft
<b>Auger Transmission</b>	N/A	N/A	N/A	Screw gear	Screw gear	Screw gear	Screw gear
<b>Auger Oil Capacity</b>	N/A	N/A	N/A	0.16 L (5.6 fl. Imp. oz.)	0.16 L (5.6 fl. Imp. oz.)	0.16 L (5.6 fl. Imp. oz.)	0.16 L (5.6 fl. Imp. oz.)
<b>Recommended Oil</b>	N/A	N/A	N/A	SAE #90 gear oil	SAE #90 gear oil	SAE 75W90 GL-5	SAE 75W90 GL-5
<b>Auger Height Adjustment</b>	Scraper bar	Scraper bar	Scraper bar	3 position adjuster	3 position adjuster	Gas assist	Gas assist
<b>Chute Rotation</b>	Remote manual lever	Remote manual lever	Manual lever	Manual lever	Manual lever	Remote electric "Joystick" control	Remote electric "Joystick" control
<b>Chute Turning Radius</b>	204°	204°	220°	195°	195°	198 ° (95° Left, 103° Right)	198 ° (95° Left, 103° Right)
<b>Deflection Control</b>	Remote manual lever	Remote manual lever	Manual lever	Manual lever	Manual lever	Remote electric "Joystick" control	Remote electric "Joystick" control
<b>Chute Material</b>	Steel	Steel	Steel	Steel	Steel	Steel	Steel
<b>Maximum Throw Distance*</b>	10 m (32.8 ft.)	10 m (32.8 ft.)	10 m (32.8 ft.)	14 m (46 ft.)	14 m (46 ft.)	15 m (49.2 ft.)	15 m (49.2 ft.)
<b>Clearing Snow Volume Capacity (Approximate)*</b>	Up to 45 metric tons/hr (50 tons/hr)	Up to 45 metric tons/hr (50 tons/hr)	Up to 45 metric tons/hr (50 tons/hr)	Up to 37 metric tons/hr (41 tons/hr)	Up to 37 metric tons/hr (41 tons/hr)	Up to 42 metric tons (46 tons/hr)	Up to 42 metric tons (46 tons/hr)
<b>Engine Type</b>	Honda GC190, 4-stroke, OHC, single-cylinder	4-stroke, OHC; single-cylinder	4-stroke, OHC; single-cylinder	4-stroke; OHV; single-cylinder	4-stroke; OHV; single-cylinder	4-stroke; OHV; single-cylinder	4-stroke; OHV; single-cylinder
<b>Honda Engine Model</b>	GC190	GC190	GS190	GX160T2	GX160T2	GX200T2	GX200T2
<b>Displacement</b>	187 cc (11.4 CID)	187 cc (11.4 CID)	187 cc (11.4 CID)	163 cc (9.9 CID)	163 cc (9.9 CID)	196 cc (12 CID)	196 cc (12 CID)
<b>Ignition System</b>	Transistorized magneto	Transistorized magneto	Transistorized magneto	Transistorized	Transistorized	Transistorized	Transistorized
<b>Recoil Starter</b>	Standard	Standard (Back-up)	Standard	Standard	Standard (Back-up)	Standard	Standard (Back-up)
<b>Electric Starter</b>	N/A	Standard 120 VAC type	N/A	N/A	Standard 12 VDC type (Battery)	N/A	Standard 12 VDC type
<b>Lubrication System</b>	Forced splash	Forced splash	Forced splash	Forced splash	Forced splash	Forced splash	Forced splash
<b>Oil Capacity</b>	0.58 L (20.4 fl. Imp. oz.)	0.58 L (20.4 fl. Imp. oz.)	0.60 L (21.1 fl. Imp. oz.)	0.60 L (21.1 fl. Imp. oz.)			
<b>Recommended Oil</b>	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later
<b>Recommended Fuel</b>	Regular unleaded gasoline (87 Octane)	Regular unleaded gasoline (87 Octane)	Unleaded gasoline (Pump octane rating 86 or higher)	Unleaded gasoline (Pump octane rating 86 or higher)			
<b>Fuel Capacity</b>	11.1 L (38.7 fl. Imp. oz.)	11.1 L (38.7 fl. Imp. oz.)	11.1 L (38.7 fl. Imp. oz.)	3.1 L (0.68 Imp. gal.)	3.1 L (0.68 Imp. gal.)	3.1 L (0.68 Imp. gal.)	3.1 L (0.68 Imp. gal.)
<b>Operational Time per Tankful **</b>	1 hour	1 hour	1 hour	2.7 hours	2.7 hours	2 hours	2 hours
<b>Wheel/Tire Size</b>	17.8 cm (7 in.)	17.8 cm (7 in.)	17.8 cm (7 in.)	N/A	N/A	N/A	N/A
<b>Overall Length</b>	126 cm (49.6 in.)	126 cm (49.6 in.)	126 cm (49.6 in.)	145.5 cm (57.3 in.)	145.5 cm (57.3 in.)	148.5 cm (58.5 in.)	148.5 cm (58.5 in.)
<b>Overall Width</b>	53 cm (20.9 in.)	53 cm (20.9 in.)	53 cm (20.9 in.)	56.5 cm (22.2 in.)	56.5 cm (22.2 in.)	63 cm (24.8 in.)	63 cm (24.8 in.)
<b>Overall Height</b>	103 cm (40.6 in.)	103 cm (40.6 in.)	103 cm (40.6 in.)	115 cm (45.3 in.)	115 cm (45.3 in.)	110.5 cm (43.5 in.)	123 cm (48.4 in.)
<b>Dry Weight</b>	40.3 kg (88.8 lb.)	42.2 kg (93 lb.)	38 kg (83.8 lb.)	66 kg (146 lb.)	75 kg (165 lb.)	105 kg (231.5 lb.)	115 kg (253.5 lb.)
<b>Lighting Coil</b>	N/A	N/A	N/A	Standard	Standard	Standard	Standard
<b>Work Light</b>	N/A	N/A	N/A	Standard	Standard	Standard (type LED)	Standard (type LED)
<b>Distributor's Warranty (non-commercial use)</b>	24-month	24-month	24-month	36-month	36-month	36-month	36-month
<b>Distributor's Warranty (commercial use)</b>	12-month	12-month	24-month	36-month	36-month	36-month	36-month

# Snowblower Specifications

SPECIFICATIONS	DUAL-STAGE					
	71 cm (28 in.), Wheel Drive	71 cm (28 in.), Track Drive	71 cm (28 in.), Track Drive, ES	81 cm (32 in.), Track Drive	81 cm (32 in.), Track Drive, ES	92 cm (36 in.), Track Drive, Hybrid I-Control, ES
<b>Model Code</b>	HSS928ACW	HSS928ACT	HSS928ACTD	HSS1332ACT	HSS1332ACTD	HSM1336ICTD Hybrid
<b>Discharge Type</b>	Dual-stage	Dual-stage	Dual-stage	Dual-stage	Dual-stage	Dual-stage
<b>Axle Type</b>	Wheel drive	Track drive				
<b>Drive Type</b>	Hydrostatic transmission (HST) with Steering Assist Drive System 1.94 - 1.97 L	Hydrostatic transmission (HST) with Steering Assist Drive System 1.94 - 1.97 L	Hydrostatic transmission (HST) with Steering Assist Drive System 1.94 - 1.97 L	Hydrostatic transmission (HST) with Steering Assist Drive System 1.94 - 1.97 L	Hydrostatic transmission (HST) with Steering Assist Drive System 1.94 - 1.97 L	Electric I-Control (24 VDC drive motors)
<b>Transmission Oil Capacity</b>	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	0.3 L (10.6 fl. Imp. oz.)
<b>Recommended Oil</b>	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later
<b>Speeds</b>	Infinitely variable	Infinitely variable (Load control)				
<b>Maximum Ground Speed</b>	Forward: 84 m/min. (275.6 ft./min) Reverse: 48 m/min. (157.5 ft./min)	Forward: 66 m/min. (216.5 ft./min) Reverse: 48 m/min. (157.5 ft./min)	Forward: 66 m/min. (216.5 ft./min) Reverse: 48 m/min. (157.5 ft./min)	Forward: 66 m/min. (216.5 ft./min) Reverse: 48 m/min. (157.5 ft./min)	Forward: 60 m/min. (196.9 ft./min) Reverse: 48 m/min. (157.5 ft./min)	Forward: 50 m/min. (164 ft./min) Reverse: 35 m/min. (114.8 ft./min)
<b>Clearing Width</b>	71 cm (28 in.)	71 cm (28 in.)	71 cm (28 in.)	81 cm (31.9 in.)	81 cm (31.9 in.)	92 cm (36.2 in.)
<b>Intake Housing Height</b>	55 cm (21.7 in.)	58 cm (22.8 in.)				
<b>Auger Diameter</b>	35.5 cm (14 in.)	39.8 cm (15.7 in.)				
<b>Auger Type</b>	Steel serrated (Spiral)	Steel serrated (Spiral)				
<b>Auger Drive</b>	Belt driven shaft	Belt driven shaft, electromagnetic clutch				
<b>Auger Transmission</b>	Screw gear	Worm gear				
<b>Auger Oil Capacity</b>	0.16 L (5.6 fl. Imp. oz.)	0.16 L (5.6 fl. Imp. oz.)	0.15 L (5.3 fl. Imp. oz.)	0.16 L (5.6 fl. Imp. oz.)	0.15 L (5.3 fl. Imp. oz.)	0.2 L (7 fl. Imp. oz.)
<b>Recommended Oil</b>	SAE 75W90 GL-5	SAE #90 gear oil				
<b>Auger Height Adjustment</b>	Skid shoes	Gas assist	Gas assist	Gas assist	Gas assist	SAE #90 gear oil
<b>Chute Rotation</b>	Remote electric "Joystick" control	Remote electric "Joystick" control				
<b>Chute Turning Radius</b>	198 ° (95° Left, 103° Right)	240°				
<b>Deflection Control</b>	Remote electric "Joystick" control	Remote electric "Joystick" control				
<b>Chute Material</b>	Steel	Steel	Steel	Steel	Steel	Steel
<b>Maximum Throw Distance*</b>	16 m (52.5 ft.)	16 m (52.5 ft.)	16 m (52.5 ft.)	17 m (55.8 ft.)	17 m (55.8 ft.)	19 m (62.3 ft.)
<b>Clearing Snow Volume Capacity (Approximate)*</b>	Up to 52 metric tons/hr (57 tons/hr)	Up to 52 metric tons (57 tons/hr)	Up to 52 metric tons (57 tons/hr)	Up to 75 metric tons (83 tons/hr)	Up to 75 metric tons (83 tons/hr)	Up to 83 metric tons (91 tons/hr)
<b>Engine Type</b>	4-stroke; OHV; single-cylinder	4-stroke, OHV, single-cylinder				
<b>Honda Engine Model</b>	GX270T2	GX270T2	GX270T2	GX390T2	GX390T2	I-GX390T2
<b>Displacement</b>	270 cc (16.5 CID)	270 cc (16.5 CID)	270 cc (16.5 CID)	389 cc (23.7 CID)	389 cc (23.7 CID)	389 cc (23.7 CID)
<b>Ignition System</b>	CDI magneto	CDI magneto				
<b>Recoil Starter</b>	Standard	Standard	Standard (Back-up)	Standard	Standard (Back-up)	N/A
<b>Electric Starter</b>	N/A	N/A	Standard 12 VDC type	N/A	Standard 12 VDC type	Standard 24 VDC type
<b>Lubrication System</b>	Forced splash	Forced splash				
<b>Oil Capacity</b>	1.1 L (38.7 fl. Imp. oz.)	1.1 L (38.7 fl. Imp. oz.)				
<b>Recommended Oil</b>	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later	SAE 5W30 API service classification SJ or later
<b>Recommended Fuel</b>	Unleaded gasoline (Pump octane rating 86 or higher)	Unleaded gasoline (Pump octane rating 86 or higher)	Unleaded gasoline (Pump octane rating 86 or higher)	Unleaded gasoline (Pump octane rating 86 or higher)	Unleaded gasoline (Pump octane rating 86 or higher)	Unleaded gasoline (Pump octane rating 86 or higher)
<b>Fuel Capacity</b>	5.3 L (1.17 Imp. gal.)	5.3 L (1.17 Imp. gal.)	5.3 L (1.17 Imp. gal.)	6.1 L (1.34 Imp. gal.)	6.1 L (1.34 Imp. gal.)	5.7 L (1.25 Imp. gal.)
<b>Operational Time per Tankful **</b>	2.3 hours	2.3 hours	2.3 hours	1.9 hours	1.9 hours	1.6 hours
<b>Wheel/Tire Size</b>	15 x 5 - 6 (2 ply) tubeless/directional	N/A	N/A	N/A	N/A	N/A
<b>Overall Length</b>	148.5 cm (58.5 in.)	176 cm (69.3 in.)				
<b>Overall Width</b>	77.5 cm (30.5 in.)	73.5 cm (28.9 in.)	73.5 cm (28.9 in.)	83.5 cm (32.9 in.)	83.5 cm (32.9 in.)	92 cm (36.2 in.)
<b>Overall Height</b>	110.5 cm (43.5 in.)	110.5 cm (43.5 in.)	123 cm (48.4 in.)	110.5 cm (43.5 in.)	123 cm (48.4 in.)	134 cm (52.8 in.)
<b>Dry Weight</b>	105 kg (231.5 lb.)	120 kg (264.6 lb.)	123 cm (48.4 in.)	105 kg (231.5 lb.)	125 kg (275.6 lb.)	240 kg (529.1 lb.)
<b>Lighting Coil</b>	Standard	Standard	Standard	Standard	Standard	Standard
<b>Work Light</b>	Standard (type LED)	Standard (24 VDC, 40 watt)				
<b>Distributor's Warranty (non-commercial use)</b>	36-month	36-month	36-month	36-month	36-month	36-month
<b>Distributor's Warranty (commercial use)</b>	36-month	36-month	36-month	36-month	36-month	36-month

\*Maximum throw distance and approximate snow clearing volume capacity will vary with individual snow conditions.

\*\*Actual fuel consumption depends on operating load.

# Generators

Today, Honda generators are found hard at work around the world—from challenging remote locations to our very own harsh climate conditions found throughout Canada. Over 50 years of Power Equipment development and innovation by Honda engineers have given rise to a lengthy line of hard-working generators and applications built to suit your needs.

**Inverter/Economy/Cyclo-Converter/Premium**



## Trusted Performance

Honda generators are powered by proven 4-stroke Honda engines that don't mix oil and gas. This offers many advantages, including clean and quiet operation, few fill-ups, low ownership costs and low emissions.

## Super Quiet Operation

Honda Super Quiet portable generators feature exhaust and muffler technology engineered to lower noise ratings within the 48-60 dB(A) ranges, so you'll never have to worry about disturbing your neighbours—or your own peace and quiet.

## Cold Climate Technology™

Available on all models, Honda Cold Climate Technology™ is specifically designed for cold

Canadian climates. The exclusive breather heater system helps prevent generator shutdown in freezing conditions, so you don't get left out in the cold.

## Light & Compact

Our latest inverter generators are smaller, lighter and quieter than ever before. Many Honda generators produce voltage that is smoother and more consistent than commercially available power sources.

## Dual-Voltage Selection

Honda high-output generators offer the best in electrical standby power and are available in 4,000 to 10,000 watt models. The dual-voltage configuration allows you to power up appliances that require 120 or 240 volts.

## CSA Approved

All Honda Generators purchased in Canada meet or exceed Canadian Standards Association (CSA) safety and Environmental Protection Agency (EPA) emissions standards. Not all manufacturers of portable generators can make this claim.

## Power Sensitive Electronics

Honda was first to develop generators capable of powering sensitive electronics. Inverter technology regulates surges of raw power and smooths them out to the same high-quality electricity as the outlets in your home. The inverter models range from 1,000 to 7,000 watts to power everything from a laptop to a cottage.

## Easy Operation

From intuitive features and ease-of-use to the carefully crafted reliability of portable power, all Honda generator controls are easily accessible and designed for ultimate convenience.

## Long-Lasting Quality

Premium Honda generators are premium products offering rugged yet clever design—specifically tested and proven to perform in the toughest situations—with long-lasting quality you can count on.

## Superior Warranty

Honda generators feature proven quality and reliability, along with a trusted warranty protection up to 36 months, and the support of a convenient Honda retailer network offering best-in-class service.



## Inverter Series

Compact and quiet, with the ability to power even the most sensitive electronic equipment.



### Ultra-Quiet 1000i

EU1000i

- Lightweight and portable 13 kg (28.7 lb.)
- Recommended for TVs, lights, fans, small power tools and more
- Inverter, stable power of 1,000 watts, at 120 VAC
- Up to 3 hours of power at maximum rated output, up to 7 hours at 25% output on a tank of gas
- Parallel-connect capability with another EU1000i



### Ultra-Quiet 2200i

EU2200i

- 2,200 watts of Honda inverter 120 VAC power
- Honda GXR120, OHC, 4-stroke commercial series engine. The GXR120 provides superb durability and reliability
- Whisper-quiet operation—57 dB(A) at rated load, 48 dB(A) at 25% load
- Easy to carry—21.1 kg (46.5 lb.)
- Double your power, connect it with a EU2200i Companion model for up to 4,400 watts maximum of power (3,600 watts rated)



### Ultra-Quiet 2200i Companion

EU2200i Companion

- 2,200 watts of Honda inverter 120 VAC power
- Honda GXR120, OHC, 4-stroke commercial series engine. The GXR120 provides superb durability and reliability
- Easy to carry—21.1 kg (46.5 lb.)
- Double your power, connect it with a EU2200i model for up to 4,400 watts maximum of power (3,600 watts rated)

## Inverter Series

Generally used for camping, RVing, home appliances, power tools and more.



### Ultra-Quiet 3000i

EU3000iK

- Lightweight and portable with wheels and a folding handle
- Suitable for many larger household appliances, great for RVing (will power a 13,500 BTU/h air conditioner)
- Inverter, stable power of 3,000 watts, at 120 VAC
- Up to 3.5 hours of power at maximum rated output, up to 7.7 hours at 25% output on a tank of gas



### Ultra-Quiet 3000i ES

EU3000iS

- Powers most furnaces, fridges, microwaves, most 13,500 BTU/h RV AC units; great for RVing and more
- Inverter—stable power of 3,000 watts, at 120 VAC
- Up to 7.2 hours of power at maximum rated output, up to 20 hours at 25% output on a tank of gas
- Electric start and back-up recoil start



### Economy 2800

EG2800iC

- At only 67 lbs, this lightweight inverter generator with Eco-Throttle™ gives you portable home backup and DIY power to keep the basics running during a power outage
- Inverter, stable power of 2,800 watts max. (2,500 watts rated)
- 5.1 hours of power at the rated load, up to 12.1 hours at 25% output per tankful
- User-friendly; the control panel includes step by step instructions to start the unit

### Ultra-Quiet 2200i Combination

EU2200i + EU2200i Companion

- Easily paired together (Ultra-Quiet 2200i and Ultra-Quiet 2200i Companion) for parallel connectivity
- Uses simple cord connection, no external box necessary
- Power up to 4,400 watts with expandable parallel connectivity
- Great for home, RV, and cottage back-up power, outdoor enthusiasts, street vendors



### Ultra-Quiet 7000i ES

EU7000iS

- Fuel injected—better fuel efficiency and lower maintenance
- Inverter, stable power of 7,000 watts, at 120/240 VAC
- Perfect for home and cottage back-up power, outdoor events and commercial worksites
- Up to 6.5 hours of power at maximum rated output, up to 18 hours at 25% output on a tank of gas
- Electric start and back-up recoil start



## Economy Series

Budget-friendly and convenient, delivering stable, portable power without sacrificing on durability or performance. Provides reliable back-up power for your home, cottage, hobby farm and more.



### Economy 2500

EP2500

- Economic, portable power of 2,500 watts, at 120 VAC
- Suitable for most sump pumps, furnace motors and fridges during emergency use
- Up to 10.2 hours of power at maximum rated output, or up to 15.3 hours at 50% output on a tank of gas



### Economy 5000

EG5000

- Economic, portable power of 5,000 watts, at 120/240 VAC
- Honda exclusive Digital Auto Voltage Regulator (DAVR) offers stable power delivery for increased performance
- Up to 7.5 hours of power at maximum rated output, up to 11 hours at 50% output on a tank of gas



### Economy 6500

EG6500

- Economic, portable power of 6,500 watts, at 120/240 VAC
- Honda exclusive Digital Auto Voltage Regulator (DAVR) offers stable power delivery for increased performance
- Up to 7.1 hours of power at maximum rated output, up to 10 hours at 50% output on a tank of gas

## CYCLO-CONVERTER



### Cyclo-Converter 3000

EM3000

- 3,000 watts of power, continuous-rated output of over 20 amps
- Suitable for majority of electrical hand tools, residential projects, or extra power source for most heaters and sump pumps (individually)
- Large muffler offers 68 dB(A) noise level at rated load
- Up to 6 hours of power at maximum rated output

## Premium Series

### Commercial 10000 GFCI ES

EB10000

- Designed for the rigours of daily industrial/commercial usage and rental applications
- 10,000 watts of power in dual-voltage configuration with GFCI protection
- Convenient 12 VDC electric start
- Honda exclusive Digital Auto Voltage Regulator (DAVR) offers stable power delivery for increased performance
- 31-litre fuel tank provides up to 6.5 hours of continuous power at maximum rated output, or up to 8.5 hours at 50% output
- Auto-throttle further extends running time by automatically adjusting engine speed to idle when no load is applied
- Hanger kit/lifting eye, wheel kit with folding handle for easier moving around the job site



## Premium Series

The number one choice in the construction and rental industry, these portable generators offer plenty of smooth power without sacrificing on durability or performance.



### Commercial 4000 GFCI

EB4000

- Designed for the rigours of daily commercial usage and rental applications
- 4,000 watts of power in dual-voltage configuration with GFCI protection
- Exclusive Intelligent Auto Voltage Regulation (iAVR) offers stable power delivery and increased wattage of 5,000 watts for 10 seconds for reactive power
- 23.5-litre fuel tank provides up to 10.1 hours of continuous power at maximum rated output, or up to 16 hours at 50% output
- Hanger kit/lifting eye for easier moving around the job site



### Commercial 5000 GFCI

EB5000

- Designed for the rigours of daily commercial usage and rental applications
- 5,000 watts of power in dual-voltage configuration with GFCI protection
- Exclusive Intelligent Auto Voltage Regulation (iAVR) offers stable power delivery and increased wattage of 7,000 watts for 10 seconds for reactive power
- 23.5-litre fuel tank provides up to 8.1 hours of continuous power at maximum rated output, or up to 11.2 hours at 50% output
- Hanger kit/lifting eye for easier moving around the job site



### Commercial 6500 GFCI

EB6500

- Designed for the rigours of daily commercial usage and rental applications
- 6,500 watts of power in dual-voltage configuration with GFCI protection
- Exclusive Intelligent Auto Voltage Regulation (iAVR) offers stable power delivery and increased wattage of 7,000 watts for 10 seconds for reactive power
- 23.5-litre fuel tank provides up to 6.9 hours of continuous power at maximum rated output, or up to 10.4 hours at 50% output
- Hanger kit/lifting eye for easier moving around the job site



### Electric Start 5000

EM5000S

- Perfect for home backup or commercial usage with convenient 12 VDC electric start and manual recoil start as back-up
- 5,000 watts of power in dual-voltage configuration
- Exclusive Intelligent Auto Voltage Regulation (iAVR) offers stable power delivery and increased wattage of 7,000 watts for 10 seconds for reactive power
- 23.5-litre fuel tank provides up to 8.1 hours of continuous power at maximum rated output, or up to 11.2 hours at 50% output
- Auto-throttle further extends running time by automatically adjusting engine speed to idle when no load is applied



### Electric Start 6500

EM6500S

- Perfect for home back-up or commercial usage with convenient 12 VDC electric start and manual recoil start as back-up
- 6,500 watts of power in dual-voltage configuration
- Exclusive Intelligent Auto Voltage Regulation (iAVR) offers stable power delivery and increased wattage of 7,000 watts for 10 seconds for reactive power
- 23.5-litre fuel tank provides up to 6.9 hours of continuous power at maximum rated output, or up to 10.4 hours at 50% output
- Auto-throttle further extends running time by automatically adjusting engine speed to idle when no load is applied

# The right wattage for the right amount of power

# Generator Specifications

HOME

APPLICATION	Approximate wattage required for running	Approximate wattage required for starting
Coffee Maker	1,750	1,750
Dishwasher	1,450	1,800
Electric Fry Pan	1,300	1,300
Electric Range		
6 in. element	1,500	1,500
8 in. element	2,100	2,100
Microwave Oven, 625 watts	625	800
Toaster		
2-slice	1,050	1,050
4-slice	1,650	1,650
Electric Blanket (queen size)	800	800
Refrigerator or Freezer	700	2,200
20" Box Fan or Table Fan	120	180
Lights (as indicated on bulbs.)	(-)	(-)
Clothes Washer	1,150	2,300
Clothes Dryer		
Gas	700	1,800
Electric	5,750	1,800
Dehumidifier	650	800
Furnace Fan, gas or fuel oil		
0.125 hp	500	1,000
0.16 hp	750	1,500
0.25 hp	900	1,800
0.3 hp	1,000	1,800
0.5 hp	1,200	2,500
Sump Pump		
0.3 hp	750	1,500
0.5 hp	1,000	2,100
Hair Dryer	300 to 1,500	300 to 1,500
Clothes Iron	1,200	1,200
Room Air Conditioner - 10,000 BTU	1,500	2,200
Central Air Conditioner		
10,000 BTU	1,500	2,200
20,000 BTU	2,500	3,300
24,000 BTU	3,800	4,950
40,000 BTU	6,000	7,800
Radio	50 to 200	50 to 200
Television (colour)		
20 in. (LCD)	65	65
26 in. (LCD)	110	110
36 to 42 in. (Plasma)	250	250
50 to 60 in. (Plasma)	340	340
VCR/ DVD	35 to 50	35 to 50
Game Console	100	100
Laptop	50 to 75	50 to 75
Computer	150	150
Modem	25	25
Monitor		
Tube Type	200 to 250	200 to 250
LCD	30	30
Printer	100	100
RV Air Conditioner - 13,500 BTU	1,800	2,800
Vacuum Cleaner		
Upright	800	1,100
Canister	1,100	1,500
Garage Door Opener		
0.25 hp	550	1,100
0.3 hp	725	1,400

Note: Check your equipment or appliance for actual wattage requirement.

WORK

APPLICATION	Approximate wattage required for running	Approximate wattage required for starting
Air Compressor		
0.5 hp	1,000	2,000
1 hp	1,500	4,500
1.5 hp	2,200	6,000
2 hp	2,800	7,700
Bench Grinder		
6 in.	720	1,000
8 in.	1,400	2,500
10 in.	1,600	3,600
Electric Cultivator - 0.3 hp	700	1,400
Electric Hedge Trimmer - 18 in.	400	550
Electric Grass Trimmer	500	650
Drum Mixer - 0.25 hp	700	1,400
Flood Lights - Mercury Hallogen	1,000	1,000
Floor Polisher		
16 in. - 0.75 hp	1,400	3,100
20 in. - 1 hp	1,600	4,500
Power Hand Drill		
0.25 in.	350	350
0.375 in.	400	400
0.5 in.	600	600
Submersible		
Water Pump 400 gpm	200	400
Centrifugal Type	500	650
Wet/ Dry Vacuum		
1.7 hp	900	900
2.5 hp	1,300	1,300
Saws		
Worm Drive (chop saw)	1,800	2,600
Band Saw	1,100	1,400
Circular Saw		
6.5 in.	800	1,200
7.25 in.	1,400	2,300
8.25 in.	1,800	3,000
Electric Chain Saw		
12 in. - 1.5 hp	900	1,100
14 in. - 2 hp	1,100	1,400
Table Saw		
1.7 hp	1,500	3,000
2.5 hp	1,800	4,500
Electric Welders		
70-amp	2,800	2,800
100-amp	3,600	3,600
200-amp	9,000	9,000
Kango Hammer	900	1,200
Farm Equipment		
Electric Fence (40 km/25 miles)	250	250
Stock Tank De-icer	1,000	1,000
Grain Cleaner	650	1,000
Portable Conveyer - 0.5 hp	1,000	2,400
Grain Elevator - 0.75 hp	1,400	3,000
Milk Cooler	1,100	2,300
Mixer - 3.25 cubic feet, 0.75 hp	2,800	7,700
Milking Machine - 2 hp	1,000	2,300

Watts ÷ AMPS = Volts | Watts ÷ Volts = AMPS | Volts x AMPS = Watts

## INVERTER SERIES

SPECIFICATIONS	Ultra-Quiet 1000i	Ultra-Quiet 2200i	Ultra-Quiet 2200i Companion	Ultra-Quiet 3000i	Ultra-Quiet 3000i ES	Ultra-Quiet 7000i ES
<b>Model Code</b>	EU1000i*	EU2200i Parallel*	EU2200i Companion†	EU3000iK	EU3000iS	EU7000iS
<b>Generator Type</b>	Inverter	Inverter	Inverter	Inverter	Inverter	Dual inverter
<b>Maximum AC Output (Watts)</b>	1,000	2,200	2,200	3,000	3,000	7,000
<b>AC Voltage Available</b>	120	120	120	120	120	120 / 240
<b>Maximum Continuous AC Output (Watts)</b>	900	1,800	1,800	2,600	2,800	5,500
<b>Max. Rated AC Amperage @ 120 V / 240 V</b>	7.5 / -	15 / -	15.0 / - (30.0 / - in parallel operation)	21.7 / -	23.3 / -	45.8 / 22.9
<b>Ground Fault Circuit Interrupter (GFCI)</b>	N/A	N/A	N/A	N/A	N/A	N/A
<b>Frequency (Hertz)</b>	60	60	60	60	60	60
<b>Automatic Voltage Regulator</b>	Standard	Standard	Standard	Standard	Standard	PWM (Pulse Width Modulation)
<b>DC Output Volts / Amps</b>	12 / 6.5	12 / 8.3	N/A	12 / 8.3	12 / 8.3	N/A
<b>Common Duplex Receptacle Specifications</b>	7.5 amps/120 VAC continuous is available as combined total from these two AC receptacles.	15.0 amps/120 VAC continuous is available as combined total from these two AC receptacles.	N/A	21.7 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 20 amps is available from a single receptacle.	23.3 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 20 amps is available from a single receptacle.	40 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 20 amps available from a single receptacle.
<b>DC Receptacle Specifications</b>	6.5 amps/12 VDC is available from this receptacle. <b>Important Note:</b> AC and DC output cannot be used simultaneously. DC system uses floating N (Neutral) type.	8.3 amps/12 VDC is available from this receptacle. <b>Important Note:</b> AC and DC output cannot be used simultaneously. DC system uses floating N (Neutral) type.	N/A	8.3 amps/12 VDC is available from this receptacle. <b>Important Note:</b> AC and DC output cannot be used simultaneously. DC system uses floating N (Neutral) type.	8.3 amps/12 VDC is available from this receptacle. <b>Important Note:</b> AC and DC output cannot be used simultaneously. DC system uses floating N (Neutral) type.	N/A
<b>DC Charging Cable</b>	Standard	Standard	N/A	Standard	Standard	N/A
<b>High Capacity 120, 120 / 240 VAC Twist Lock Receptacle Specifications</b>	N/A	N/A	This receptacle (NEMA # L5-30R) will supply 30.0 amps at 120 VAC continuously in parallel operation.	This receptacle (NEMA # L5-30R) will supply 21.7 amps at 120 VAC continuously.	This receptacle (NEMA # L5-30R) will supply 23.3 amps at 120 VAC continuously.	This receptacle (NEMA # L5-30R) will supply 22.9 amps at 120 VAC continuously.
						
<b>Engine Type</b>	Honda GXH50T OHV, 4-stroke, air-cooled	Honda GXR120T, OHC, 4-stroke, air-cooled	Honda GXR120T, OHC, 4-stroke, air-cooled	Honda GX160T2 OHV, 4-stroke, air-cooled	Honda GX200T2 OHV, 4-stroke, air-cooled	Honda GX390T2 OHV, 4-stroke, air-cooled
<b>Displacement</b>	49.4 cc	121 cc	121 cc	163 cc	196 cc	389 cc
<b>Starting System</b>	Manual recoil	Manual recoil	Manual recoil	Manual recoil	Electric/recoil	Electric/recoil
<b>Low Level Oil Alert™ System</b>	Standard	Standard	Standard	Standard	Standard	Standard (LED display)
<b>Auto Throttle</b>	Eco-Throttle standard	Eco-Throttle standard	Eco-Throttle standard	Eco-Throttle standard	Eco-Throttle standard	Eco-Throttle standard
<b>Remote Start Capability</b>	No	No	No	No	No	Optional
<b>Fuel Tank Capacity</b>	2 L (0.44 Imp. gal.)	3.6 L (0.79 Imp. gal.)	3.6 L (0.79 Imp. gal.)	5.9 L (1.30 Imp. gal.)	13 L (2.86 Imp. gal.)	19.2 L (4.22 Imp. gal.)
<b>Transport Wheels</b>	N/A	N/A	N/A	Standard	Optional wheel kits: 4-wheels, same size: P/N 06423-ZS9-T30 4-wheels, large RR & front swivel/locking wheels: P/N 06424-ZS9-000AH 2-wheels with telescoping handles: P/N 06425-ZS9-020AH	2-wheel kit standard
<b>Lifting Hook</b>	N/A	N/A	N/A	N/A	N/A	Optional (P/N 06531-Z11- E00ZA)
<b>Battery</b>	N/A	N/A	N/A	N/A	Standard (P/N 31500-HNI-003AH)	Standard (P/N 31500-MCR-D02AH)
<b>Approximate Running Time (hrs.) / Tankful</b>	3** / 7***	3.2** / 8.1***	3.2** / 8.1***	3.5** / 7.7***	7.2** / 20***	6.5** / 18 ***
<b>Rated Fuel Consumption (litres/hr)</b>	0.67**	1.14**	1.14**	1.68**	1.78**	2.95**
<b>Noise Level dB(A) (1.5 m to 7 m)</b>	57** / 52***	57** / 48***	57** / 48***	64** / 57***	58** / 48***	60**
<b>Length (Without Handles and Wheels)</b>	451 mm (17.8 in.)	509 mm (20 in.)	509 mm (20.0 in.)	622 mm (24.5 in.)	655 mm (25.8 in.)	N/A
<b>Length (With Handles and Wheels)</b>	N/A	N/A	N/A	N/A	N/A	1,198 mm (47.2 in.)
<b>Width (Without Handles and Wheels)</b>	242 mm (9.5 in.)	290 mm (11.4 in.)	290 mm (11.4 in.)	379 mm (14.9 in.)	445 mm (17.5 in.)	539 mm (21.2 in.)
<b>Width (With Handles and Wheels)</b>	N/A	N/A	N/A	N/A	N/A	700 mm (27.6 in.)
<b>Height (Without Lift-Hook)</b>	379 mm (15 in.)	425 mm (16.7 in.)	425 mm (16.7 in.)	489 mm (19.3 in.)	555 mm (21.9 in.)	721 mm (28.4 in.)
<b>Height (With Lift-Hook)</b>	N/A	N/A	N/A	N/A	N/A	821 mm (32.3 in.)
<b>Dry Weight</b>	13 kg (28.7 lb.)	21.1 kg (46.5 lb.)	21.1 kg (46.5 lb.)	35.2 kg (77.6 lb.)	59 kg (130 lb.)	118.1 kg (260.4 lb.)
<b>Cold Climate Technology™</b>	Standard	Standard	Standard	Standard	Standard	Standard

\*Two EU1000i units in parallel: 15 amps/120 volts continuous is available from the 20 amp T-slot receptacle. Note: 16.6 amps is available for approx. 30 min. Optional parallel cable is P/N 08E93-HPK-123HI. †Optional parallel operation cable (part number: 08E93-HPK-123HI) required for parallel connectivity. Maximum continuous output in parallel operation is 3200 watts or 26.7 amps @ 120 VAC. \*\*At max. rated output (continuous) in Watts.\*\*\*At 25% rated output (continuous) in Watts.

# Generator Specifications

	ECONOMY INVERTER	ECONOMY SERIES			CYCLO-CONVERTER	PREMIUM SERIES
SPECIFICATIONS	Economy 2800	Economy 2500	Economy 5000	Economy 6500	Cyclo-Converter 3000	Commercial 4000 GFCI
<b>Model Code</b>	EG2800	EP2500	EG5000	EG6500	EM3000	EB4000
<b>Generator Type</b>	Inverter	Brush type	Brush type	Brush type	Cycloconverter	Brush type
<b>Maximum AC Output (Watts)</b>	2,800	2,500	5,000	6,500	3,000	4,000
<b>AC Voltage Available</b>	120	120	120 / 240	120 / 240	120	120 / 240
<b>Maximum Continuous AC Output (Watts)</b>	2,500	2,300	4,500	5,500	2,600	3,500 5,000 (iAVR)
<b>Max. Rated AC Amperage @ 120 V / 240 V</b>	20.8 / -	19.2 / -	37.5 / 18.8	45.8 / 22.9	21.7 / -	29.2 / 14.6 (41.7 / 20.8 for 10 sec. iAVR)
<b>Ground Fault Circuit Interrupter (GFCI)</b>	N/A	N/A	N/A	N/A	N/A	Standard
<b>Frequency (Hertz)</b>	60	60	60	60	60	60
<b>Automatic Voltage Regulator</b>	PWM (Pulse Width Modulation)	Standard	Standard digital (DAVR)	Standard digital (DAVR)	Standard	Standard iAVR (Intelligent Automatic Voltage Regulator)
<b>DC Output Volts / Amps</b>	N/A	N/A	N/A	N/A	12 / 8.3	N/A
<b>Common Duplex Receptacle Specifications</b>	20.8 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 20 amps is available from a single receptacle.	19.2 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 19.2 amps is available from each single receptacle.	37.5 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 20 amps is available from each single receptacle.	40 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 20 amps is available from each single receptacle.	21.7 amps/120 VAC continuous is available as combined total from these two AC receptacles. 20 amps is maximum available from each single receptacle.	29.2 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 14.6 amps available from each GFCI duplex receptacle.
<b>DC Receptacle Specifications</b>	N/A	N/A	N/A	N/A	8.3 amps/12 VDC is available from this receptacle. <b>Important Note:</b> AC and DC output cannot be used simultaneously. DC system uses floating N (Neutral) type.	N/A
<b>DC Charging Cable</b>	N/A	N/A	N/A	N/A	Optional (P/N 32650-892-010AH)	N/A
<b>High Capacity 120, 120 / 240 VAC Twist Lock Receptacle Specifications</b>	This receptacle (NEMA # L5-30R) will supply 20.8 amps at 120 VAC continuously    	N/A	This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 18.8 amps at 240 VAC and 37.5 amps at 120 VAC continuously.	This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 22.9 amps at 240 VAC and 45.8 amps at 120 VAC continuously.	This receptacle (NEMA # L5-30R) will supply 21.7 amps at 120 VAC continuously.	This receptacle (NEMA # L5-30R) will supply 29.2 amps at 120 VAC continuously. This receptacle (NEMA # L14-20R) will supply 14.6 amps (3.5 kVA) at 240 VAC continuously.    
<b>Engine Type</b>	Honda GC190LA	Honda GX160H1 OHV, 4-stroke, air-cooled	Honda GX390T2 OHV, 4-stroke, air-cooled	Honda GX390T2 OHV, 4-stroke, air-cooled	Honda GX200T2 OHV, 4-stroke, air-cooled	Honda iGX270T2 OHV, 4-stroke, air-cooled
<b>Displacement</b>	186 cc	163 cc	389 cc	389 cc	196 cc	270 cc
<b>Starting System</b>	Manual recoil	Manual recoil	Manual recoil	Manual recoil	Manual recoil	Manual recoil
<b>Low Level Oil Alert™ System</b>	Standard	Standard	Standard	Standard	Standard	Standard
<b>Auto Throttle</b>	Eco-Throttle™ Standard	N/A	N/A	N/A	N/A	Standard
<b>Remote Start Capability</b>	No	No	No	No	No	No
<b>Fuel Tank Capacity</b>	8.1 L (1.8 Imp. gal.)	14.5 L (3.19 Imp. gal.)	24 L (5.28 Imp. gal.)	24 L (5.28 Imp. gal.)	9.7 L (2.13 Imp. gal.)	23.5 L (5.17 Imp. gal.)
<b>Transport Wheels</b>	Optional 2-wheel kit: P/N 06425-Z43-001AH	N/A	Optional (P/N 06710-Z22-A40ZA)	Optional (P/N 06710-Z22-A40ZA)	N/A	2 Wheel standard
<b>Lifting Hook</b>	N/A	N/A	Optional (P/N 06810-Z22-A30ZA)	Optional (P/N 06810-Z22-A30ZA)	N/A	Standard
<b>Battery</b>	N/A	N/A	N/A	N/A	N/A	N/A
<b>Approximate Running Time (hrs.) / Tankful</b>	5.1* / 12.1***	10.2** / 15.3***	7.5** / 10.4***	7.1** / 10.4***	6.1**	10.1** / 16.4***
<b>Rated Fuel Consumption (litres/hr)</b>	1.60**	1.42**	3.22**	3.38**	1.58**	2.32**
<b>Noise Level dB(A) (1.5 m to 7 m)</b>	69** / 61***	69**	73**	74**	68**	71**
<b>Length (Without Handles and Wheels)</b>	430 mm (16.9 in.)	597 mm (23.5 in.)	681 mm (26.8 in.)	681 mm (26.8 in.)	445 mm (17.5 in.)	681 mm (26.8 in.)
<b>Length (With Handles and Wheels)</b>	N/A	N/A	N/A	N/A	N/A	1,043 mm (41.1 in.)
<b>Width (Without Handles and Wheels)</b>	448 mm (17.6 in.)	434 mm (17.1 in.)	530 mm (20.9 in.)	530 mm (20.9 in.)	402 mm (15.8 in.)	530 mm (20.9 in.)
<b>Width (With Handles and Wheels)</b>	N/A	N/A	N/A	N/A	N/A	706 mm (27.8 in.)
<b>Height (Without Lift-Hook)</b>	481 mm (18.9 in.)	437 mm (17.2 in.)	571 mm (22.5 in.)	571 mm (22.5 in.)	480 mm (18.9 in.)	719 mm (28.3 in.)
<b>Height (With Lift-Hook)</b>	N/A	N/A	N/A	N/A	N/A	773 mm (30.4 in.) standard
<b>Dry Weight</b>	29.9 kg (65.9 lb.)	45 kg (99.2 lb.)	77.5 kg (170.9 lb.)	80 kg (176.4 lb.)	31 kg (68.3 lb.)	83.4 kg (183.9 lb.)
<b>Cold Climate Technology™</b>	Standard	Standard	Standard	Standard	Standard	Standard

# Generator Specifications

	PREMIUM SERIES				
SPECIFICATIONS	Commercial 5000 GFCI	Commercial 6500 GFCI	Commercial 10000 GFCI ES	Electric Start 5000	Electric Start 6500
<b>Model Code</b>	EB5000	EB6500	EB10000	EM5000S	EM6500S
<b>Generator Type</b>	Brush type	Brush type	Brush type	Brush type	Brush type
<b>Maximum AC Output (Watts)</b>	5,000	6,500	10,000	5,000	6,500
<b>AC Voltage Available</b>	120 / 240	120 / 240	120 / 240	120 / 240	120 / 240
<b>Maximum Continuous AC Output (Watts)</b>	4,500 7,000 (iAVR)	5,500 7,000 (iAVR)	9,000	4,500 7,000 (iAVR)	5,500 7,000 (iAVR)
<b>Max. Rated AC Amperage @ 120 V / 240 V</b>	37.5 / 18.8 (58.3 / 29.2 for 10 sec. iAVR)	45.8 / 22.9 (58.3 / 29.2 for 10 sec. iAVR)	37.5 x 2 (75) / 37.5	37.5 / 18.8 (58.3 / 29.2 for 10 sec. iAVR)	45.8 / 22.9 (58.3 / 29.2 for 10 sec. iAVR)
<b>Ground Fault Circuit Interrupter (GFCI)</b>	Standard	Standard	Standard	N/A	N/A
<b>Frequency (Hertz)</b>	60	60	60	60	60
<b>Automatic Voltage Regulator</b>	Standard iAVR (Intelligent Automatic Voltage Regulator)	Standard iAVR (Intelligent Automatic Voltage Regulator)	Standard DAVR (Digital Automatic Voltage Regulator)	Standard iAVR (Intelligent Automatic Voltage Regulator)	Standard iAVR (Intelligent Automatic Voltage Regulator)
<b>DC Output Volts / Amps</b>	N/A	N/A	N/A	12 / 8	12 / 8
<b>Common Duplex Receptacle Specifications</b>	37.5 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles. Maximum of 18.8 amps available from each GFCI duplex receptacle.	40 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles. Maximum of 20 amps available from each GFCI duplex receptacle.	40 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles. Maximum of 20 amps available from each GFCI duplex receptacle.	37.5 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles. Maximum of 20 amps available from each GFCI duplex receptacle.	40 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles. Maximum of 20 amps available from each GFCI duplex receptacle.
<b>DC Receptacle Specifications</b>	N/A	N/A	N/A	8 amps/12 VDC is available from these +/- thumb screw terminals. <b>Important Note:</b> AC and DC output can be used simultaneously on this series only.	8 amps/12 VDC is available from these +/- thumb screw terminals. <b>Important Note:</b> AC and DC output can be used simultaneously on this series only.
<b>DC Charging Cable</b>	N/A	N/A	N/A	Optional (P/N 32650-825-015)	Optional (P/N 32650-825-015)
<b>High Capacity 120, 120 / 240 VAC Twist Lock Receptacle Specifications</b>	This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 18.8 amps (4.5 kVA) at 240 VAC continuously.    	This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 22.9 amps (5.5 kVA) at 240 VAC continuously.	This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 30 amps at 120/240 VAC continuously. This receptacle (CS6364/S) will supply 37.5 amps (9 kVA) at 240 VAC or 50 amps (6 kVA) at 120 VAC continuously.	This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 18.8 amps (4.5 kVA) at 240 VAC continuously.	This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 22.9 amps (5.5 kVA) at 240 VAC continuously.
<b>Engine Type</b>	Honda iGX390T2 OHV, 4-stroke, air-cooled	Honda iGX390T2 OHV, 4-stroke, air-cooled	Honda GX630H OHV, 90° V-Twin design, 4-stroke, air-cooled	Honda iGX390T2 OHV, 4-stroke, air-cooled	Honda iGX390T2 OHV, 4-stroke, air-cooled
<b>Displacement</b>	389 cc	389 cc	688 cc	389 cc	389 cc
<b>Starting System</b>	Manual recoil	Manual recoil	Electric	Electric/recoil	Electric/recoil
<b>Low Level Oil Alert™ System</b>	Standard	Standard	Standard	Standard	Standard
<b>Auto Throttle</b>	Standard	Standard	Standard	Standard	Standard
<b>Remote Start Capability</b>	No	No	Optional	Optional	Optional
<b>Fuel Tank Capacity</b>	23.5 L (5.17 Imp. gal.)	23.5 L (5.17 Imp. gal.)	31 L (6.82 Imp. gal.)	23.5 L (5.17 Imp. gal.)	23.5 L (5.17 Imp. gal.)
<b>Transport Wheels</b>	2 Wheel standard	2 Wheel standard	2 Wheel standard	2 Wheel standard	2 Wheel standard
<b>Lifting Hook</b>	Standard	Standard	Standard	Optional (P/N 06810-Z22-A30ZA)	Optional (P/N 06810-Z22-A30ZA)
<b>Battery</b>	N/A	N/A	Standard	Standard (P/N 31500-MCR-J01)	Standard (P/N 31500-MCR-J01)
<b>Approximate Running Time (hrs.) / Tankful</b>	8.1** / 11.2***	6.9** / 10.4***	6.5**	8.1** / 11.2***	6.9** / 10.4***
<b>Rated Fuel Consumption (litres/hr)</b>	2.90**	3.40**	4.77**	2.90**	3.40**
<b>Noise Level dB(A) (1.5 m to 7 m)</b>	72**	73**	72**	72**	73**
<b>Length (Without Handles and Wheels)</b>	681 mm (26.8 in.)	681 mm (26.8 in.)	973 mm (38.3 in.)	681 mm (26.8 in.)	681 mm (26.8 in.)
<b>Length (With Handles and Wheels)</b>	1,043 mm (41.1 in.)	1,051 mm (41.4 in.)	1,420/1,041 mm (55.9/50 in.) †	1,043 mm (41.1 in.)	1,051 mm (41.4 in.)
<b>Width (Without Handles and Wheels)</b>	530 mm (20.9 in.)	530 mm (20.9 in.)	530 mm (20.9 in.)	530 mm (20.9 in.)	530 mm (20.9 in.)
<b>Width (With Handles and Wheels)</b>	706 mm (27.8 in.)	706 mm (27.8 in.)	703 mm (27.7 in.)	706 mm (27.8 in.)	706 mm (27.8 in.)
<b>Height (Without Lift-Hook)</b>	719 mm (28.3 in.)	719 mm (28.3 in.)	695 mm (27.4 in.)	719 mm (28.3 in.)	719 mm (28.3 in.)
<b>Height (With Lift-Hook)</b>	773 mm (30.4 in.) standard	773 mm (30.4 in.) standard	891 mm (35.1 in.) standard	773 mm (30.4 in.) optional lift hook	773 mm (30.4 in.) optional lift hook
<b>Dry Weight</b>	94.6 kg (208.6 lb.)	97.2 kg (214.3 lb.)	102.2 kg (225.3 lb.)	102.2 kg (225.3 lb.)	104.8 kg (231 lb.)
<b>Cold Climate Technology™</b>	Standard	Standard	Standard	Standard	Standard

\*\*At max. rated output (continuous) in Watts. \*\*\*At 50% rated output (continuous) in Watts.



## Meet The Honda Winter Lineup

Find the right Honda products to get the job done. There are more than 300 Honda Power Equipment retailers nation-wide, providing you with quality services and care. Visit your local retailer or [honda.ca](http://honda.ca) for full product details and pricing.

Find a Honda Power Equipment retailer nearest to your community at [powerequipment.honda.ca](http://powerequipment.honda.ca)



Honda builds its Power Equipment to meet some of the toughest engineering standards in the world and formulates its oils and chemicals to those same high standards, thereby helping to maintain your Power Equipment at peak performance. You buy Honda because of its quality, performance and reliability. Why not match one of the finest products you can own with the finest oils and chemicals on the market? Don't settle for an imitation when you can buy the original.

### Honda Genuine Accessories

Honda is synonymous with quality and performance. Whether you own a Honda vehicle, motorcycle, ATV, side-by-side or a product from the Power Equipment or Marine lineups, chances are your choice to purchase a Honda was based on reputation. Honda Genuine Accessories are no different. In fact, they are the only accessories that have been approved by the engineers who originally designed your Honda. This ensures that not only will they perform as they were designed to, but they'll fit right as well.

### Honda Genuine Parts and Service

Honda Genuine Parts are made for your Honda. They help maintain the quality, reliability and performance of your product. When the time comes for you to service, repair or enhance your Honda, don't settle for an imitation. Only Honda Genuine Parts are specifically engineered to maintain the original operating specifications of your Honda and offer a perfect fit and finish every time. Let trained Honda technicians keep your Honda healthy with Honda Genuine Parts.

  Honda Outdoors Canada   @HondaOutdoors

FPO FSC

For optimum performance and safety, please read your owner's manual thoroughly before operating your Honda Power Equipment product. Specifications subject to change without notice. Models and colours may not be exactly as shown. Errors and omissions excepted. See your Honda Power Equipment retailer or [honda.ca](http://honda.ca) for full details. TMs - Trademarks of Honda Canada Inc. or used under licence from Honda Motor Co., Ltd.

Printed in Canada 2019.

**HONDA**